

s47(3)(b)

s47(3)(b)








s47(3)(b)



POOL PUMP
OUTLET
MAX 8.0 AMPS

**A25 TS**
evolution

WATER &
LIGHTING
SOLUTIONS

Input Voltage 230VAC
50HZ 10A(Max)
Output Voltage 8.5V DC
Output Rating 25 AMPS DC
Safety Approval No. SGSEA/100780
Rating IP24  N28089

Serial Number

10976

WARNING: Must be serviced by qualified electrical personnel.



s47(3)(b)

s47(3)(b)

s47(3)(b)

100%

HIGH SALT

100%

HIGH SALT



10%



CHLORINE CONTROL

Low High



SALT & MINERAL COMPATIBLE

evoch

www.evolutionwls.com.au

SELF CLEANING CHLO

olution | WATER & LIGHTING SOLUTIONS



RESET

vochlor



TIMER OFF MANUAL



LEANING CHLORINATOR







POOL LIGHTING TRANSFORMER

LVT 50

DUAL 12V / 25VA OUTPUT

FOR USE WITH 2 X SPA ELECTRICS LED PRODUCTS

Spa Electrics

NEED ASSISTANCE? CALL US ON 03 9793 2299 OR VISIT
WWW.SPAELECTRICS.COM.AU



OIR Disclosure












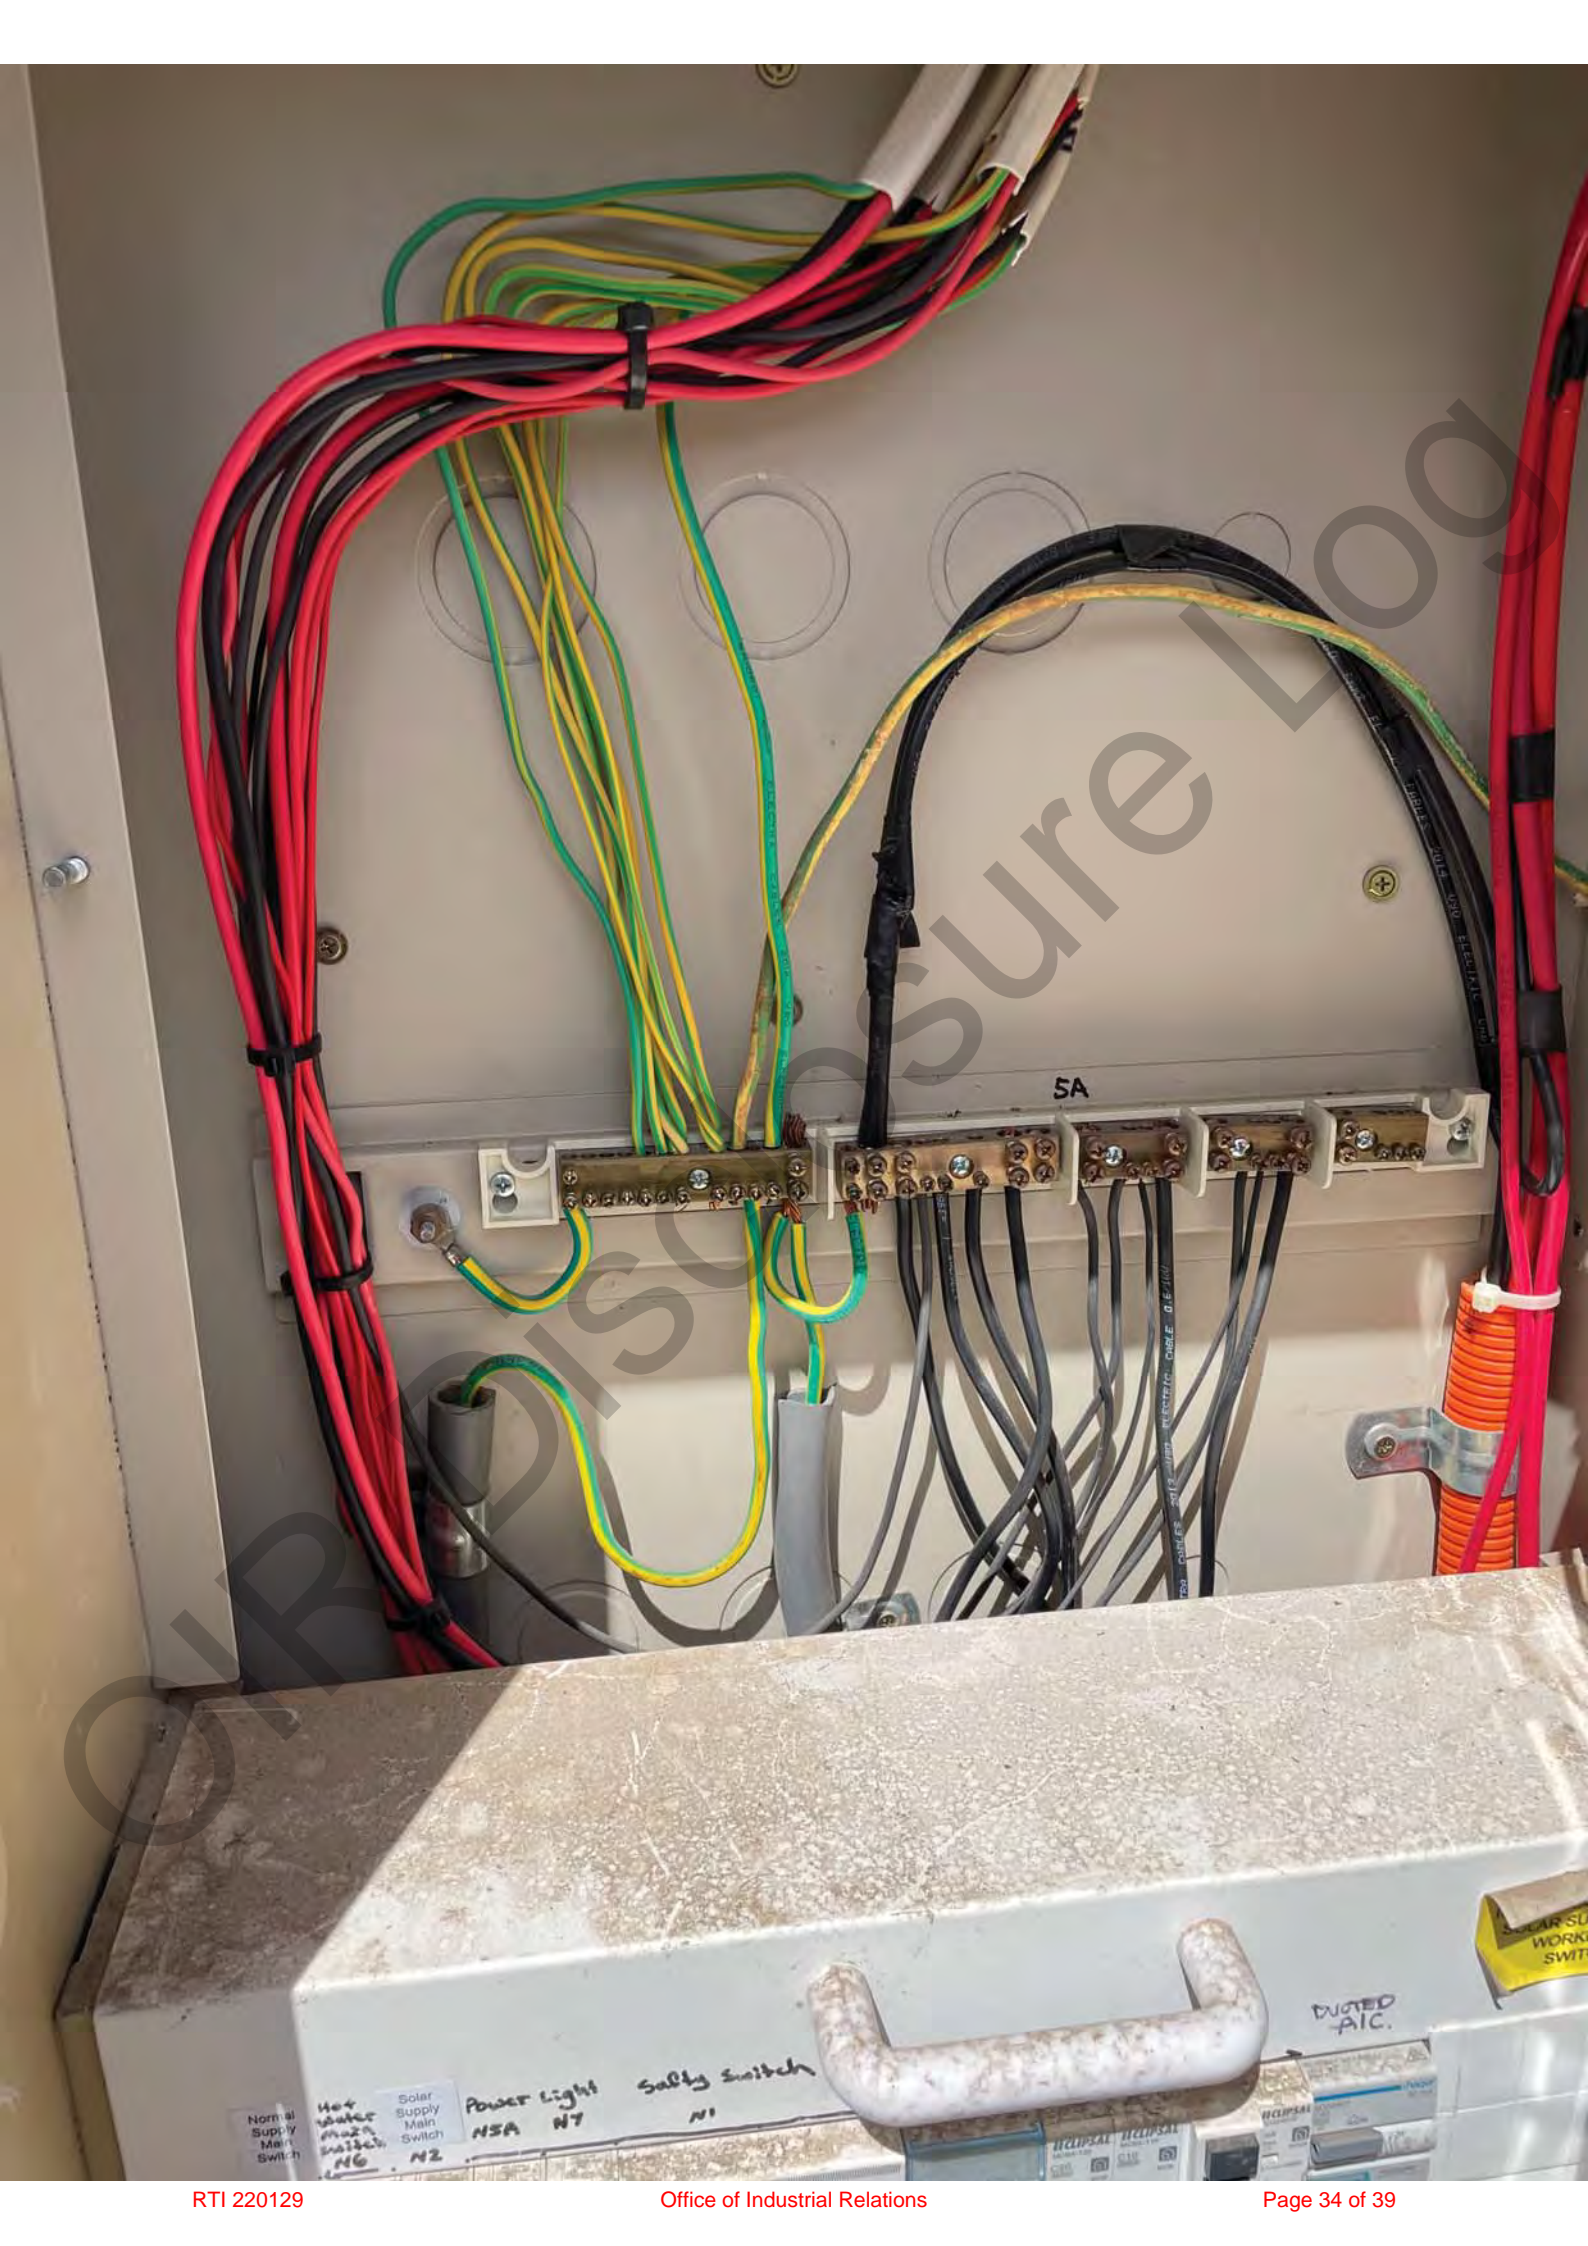

Andrew Schultz
0419 359 973
ELECTRICIAN
• Repairs
• Maintenance
• Installations

Log

Normal
Supply
Main
Switch

Hot
Water
Main
Switch
N6

Solar
Supply
Main
Switch
N2

Power Light
NSA N7

Salty Switch
N1

Stove
N3

Power Light
N8 N9

Salty Sw.
N4

DUCTED
A.C.

WARNING
DUAL SUPPLY
ISOLATE BOTH NORMAL AND
SOLAR SUPPLIES BEFORE
WORKING ON THIS
SWITCHBOARD

VOLTEX MCB-1
C20 20A 3000V
I ON
I TO OFF

II CLIPSAL MCB-120 C20 20A 3000V MCB

II CLIPSAL MCB-120 C20 20A 3000V MCB

II CLIPSAL MCB-120 C20 20A 3000V MCB

II CLIPSAL MCB-110 C10 10A 3000V MCB

II CLIPSAL ICD44500 10A 3000V RCBE

II CLIPSAL MCB-120 C20 20A 3000V MCB

II CLIPSAL MCB-110 C10 10A 3000V MCB

II CLIPSAL ICD24030 10A 3000V RCBE

ADAB401 C40 40A 30mA

WARNING
STAY ON
ROOF
Open Circuit Voltage 410 V
Short Circuit Current 12 A





