







Champion  
Hoisting Systems

**Genie SUPERLIFT**  
MAXIMUM LOAD 2000 kg (4400 lbs)  
MAXIMUM HEIGHT 11.00 m (36.00 ft)  
GENIE INDUSTRIES

**OPERATING INSTRUCTIONS**

**FOLLOW THESE SAFETY RULES**

**BE IMPORTANT**

Genie Industries

SAFETY



OIR Disclosure Log



OIR Disclosure Log



FOIR Disclosure Log





Disclosure Log





OIR Disclosure Log



Chameleon  
Touring Systems P/L



If Door is Closed  
Please Contact the  
Office on  
07 3260 2663

# IN CASE OF FIRE

- R**EMOVE PEOPLE from immediate danger
- A**LERT THE FIRE SERVICE
  - break manual call point
  - call 000
- C**ONFINE FIRE & SMOKE close doors and windows (if safe to do so)
- E**VACUATE to the ASSEMBLY AREA

## EVACUATION PROCEDURES

- STAGE 1:- Removal of people from the immediate Danger Area**  
Occupants and staff in the immediate danger area are to assemble a safe distance away from the fire and smoke. When the area has been evacuated all doors and windows should be closed to contain fire.
- STAGE 2:- Removal to a Safe Area**  
If the severity of the smoke or fire warrants further evacuation, occupants should be moved through fire/smoke doors to a safe area.
- STAGE 3:- Complete Evacuation of Entire Complex**  
Should the emergency necessitate evacuation of the whole building, the Manager or the Fire Service will direct occupants from the safe place to the **ASSEMBLY AREA**.
- STAGE 4:- Roll Call.**  
To be conducted as soon as possible and to ensure all Persons are accounted for. Report all missing persons to **FIRE OFFICERS**.


Mobility impaired persons should evacuate immediately on hearing the fire alarm assisted by a nominated person.



**000**  
**EMERGENCY**  
In an emergency dial 000


# EVACUATION SIGN and DIAGRAM

233 Lavarack Avenue Eagle Farm

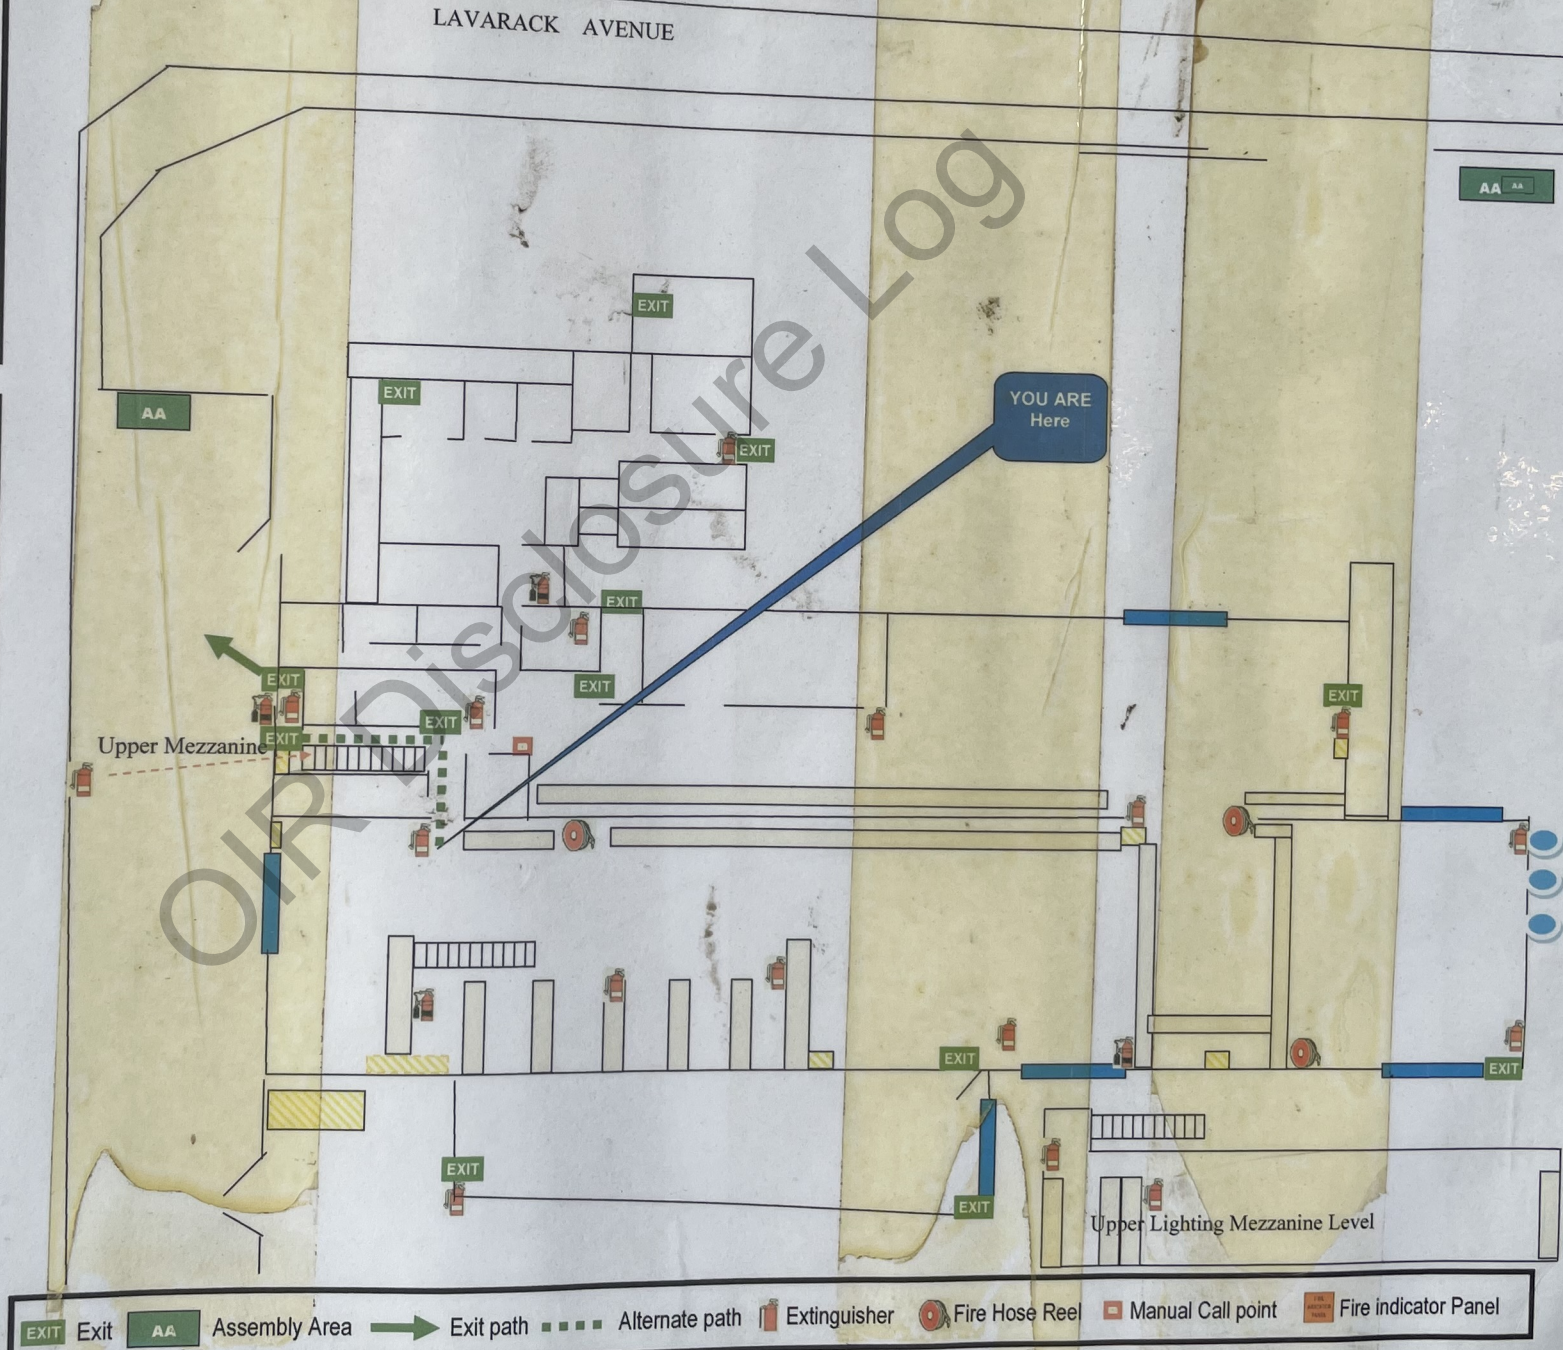



Sign in

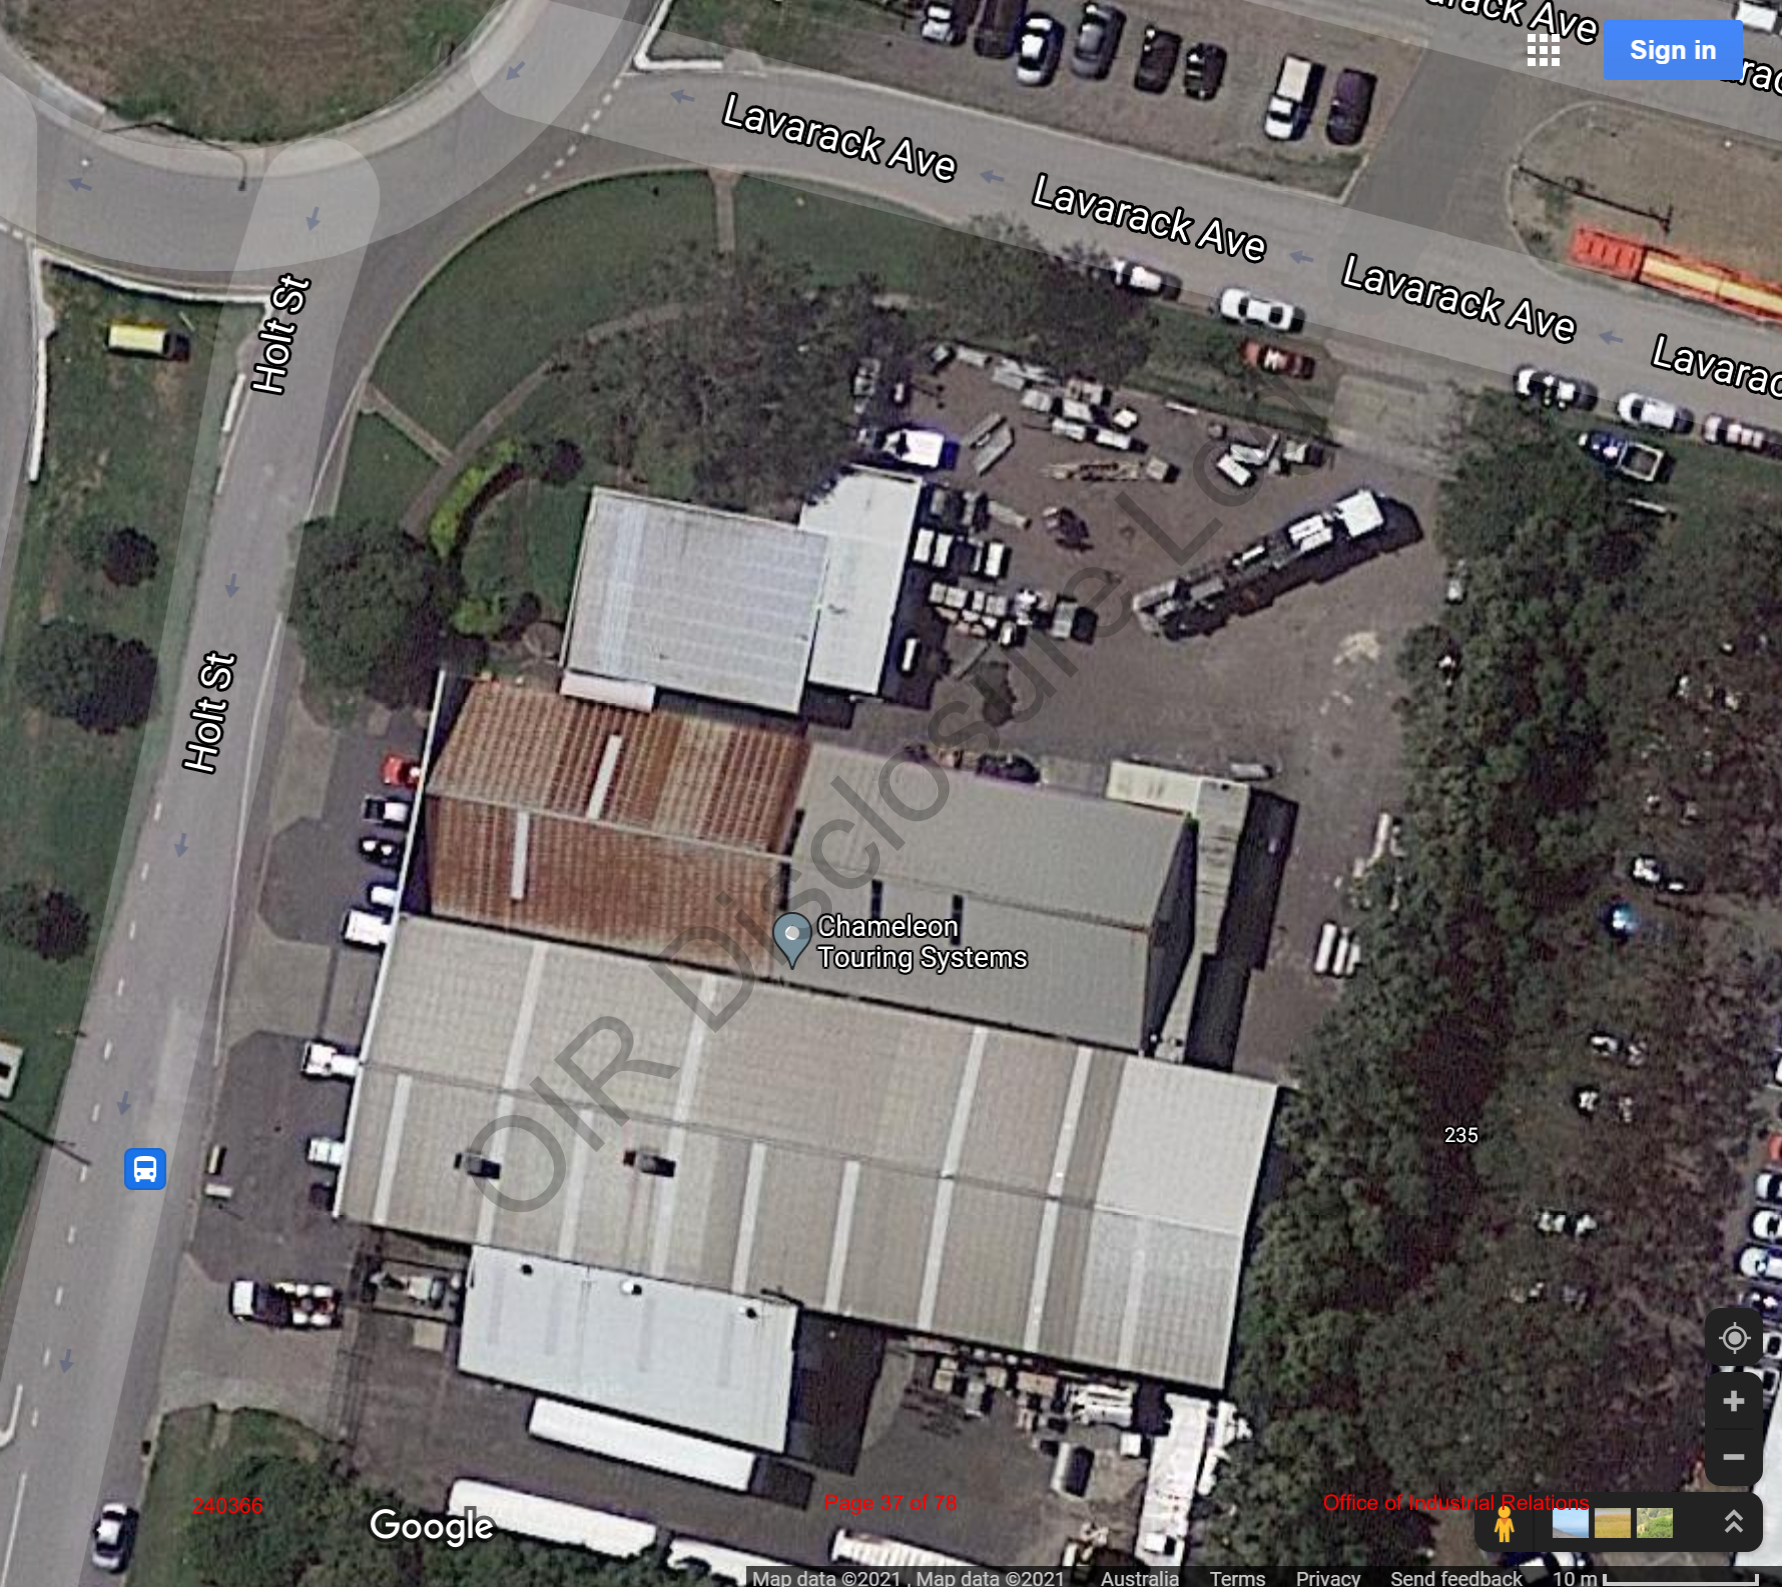

Lavarack Ave

Lavarack Ave

Lavarack Ave

Lavarack Ave

Holt St

Holt St

Chameleon  
Touring Systems

235

240366

Google

Page 37 of 78

Office of Industrial Relations

