



Image Log



104875
A95
042270153
15
8029
5 0 23 9 4 24









AIR DISCOVERY



OIP Disclosure Log









UJF-20210101








S...
Pool Tiling
0400 5... 385







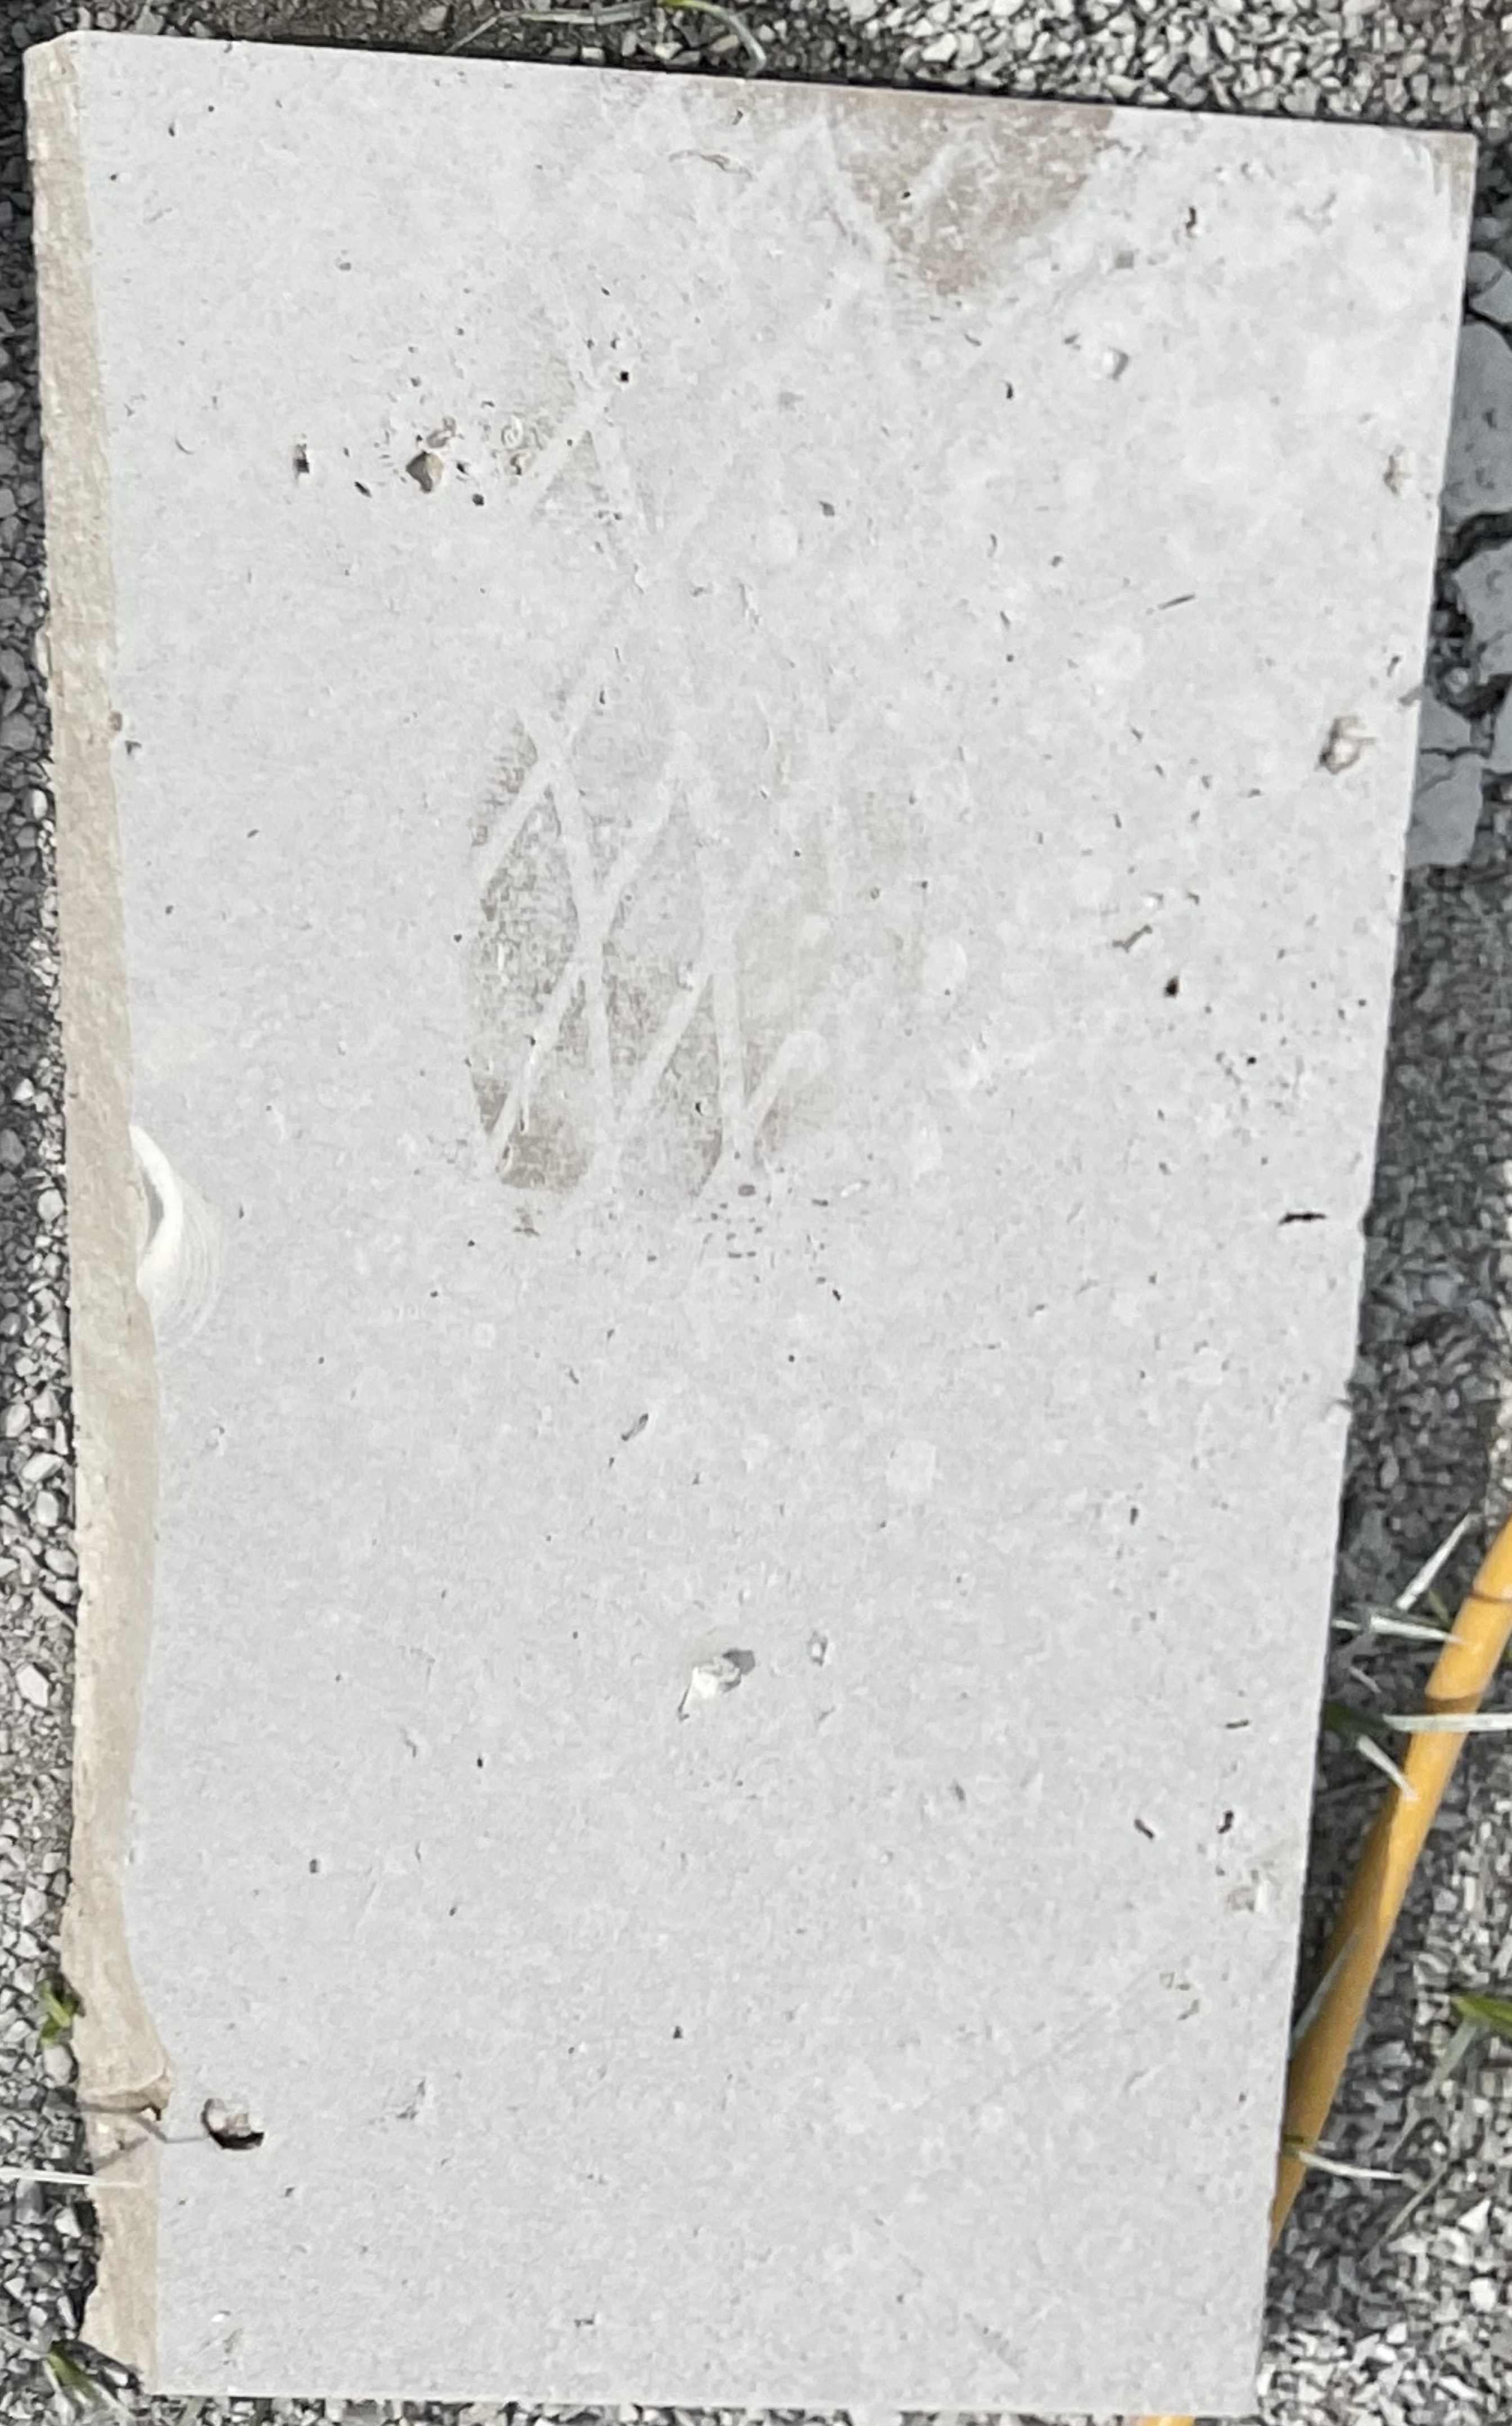









THOR
5.0Ah
18V FUEL

MPEK

M18 FUEL

MILWAUKEE







TILING PRODUCTS AUSTRALIA
TILING PRODUCTS

FRUIT

Makita
NI5588
12V
100% NiMH
1.2Ah
12V
100% NiMH
1.2Ah



PRIMO

Pressure Lock

SAK

LILING

WHITE

Globalcote

INFRACOTE®

Don't paint it...
Globalcote it!



SATIN
INFRACOTE SATIN - H05
IM15H05
BATCH:
150323

15 Litre

www.globalcote.com.au



SAFETY & FIRST AID

- **Contact Poisons Information Centre (Phone Australia: 13 11 26) or a doctor.**
- **IF SWALLOWED:** Rinse mouth. Do NOT induce vomiting.
- **IF ON SKIN:** Wash with plenty of soap and water.
- **IF INHALED:** Remove victim to fresh air and keep at rest in a position comfortable for breathing.
- **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- **IF EXPOSED OR CONCERNED:** Get medical advice/attention.

PRECAUTIONS

- Wear protective clothing, gloves, eye/face protection and suitable respirator.
- Use this product in a well ventilated area.
- Ensure that the surface is sound, clean and dry.
- Ensure that the application of the product is in accordance with Globalcote recommendations.
- Due care and consideration should be taken where water collection methods are present. Globalcote recommends allowing 10 days curing and an initial rinse (rain or tap water wash) prior to reconnecting water collection systems.

NOTE: SDS available at www.globalcote.com.au

SA
INFRACOTE



IM15H05

nd
or
for
ses, if
ning.

NS

oves, eye/
e respirator.
entilated area.
ound, clean

ion of the product
Globalcote

deration should be
collection methods are
ate recommends allowing
nd on initial rinse (rain or
prior to reconnecting
on systems.

Globalcote at www.globalcote.com.au



SATIN

INFRACOTE SATIN - H05

**BATCH:
150323**



IM15H05

www.globalcote.com.au